


Industrial Tablet

P80 User Manual

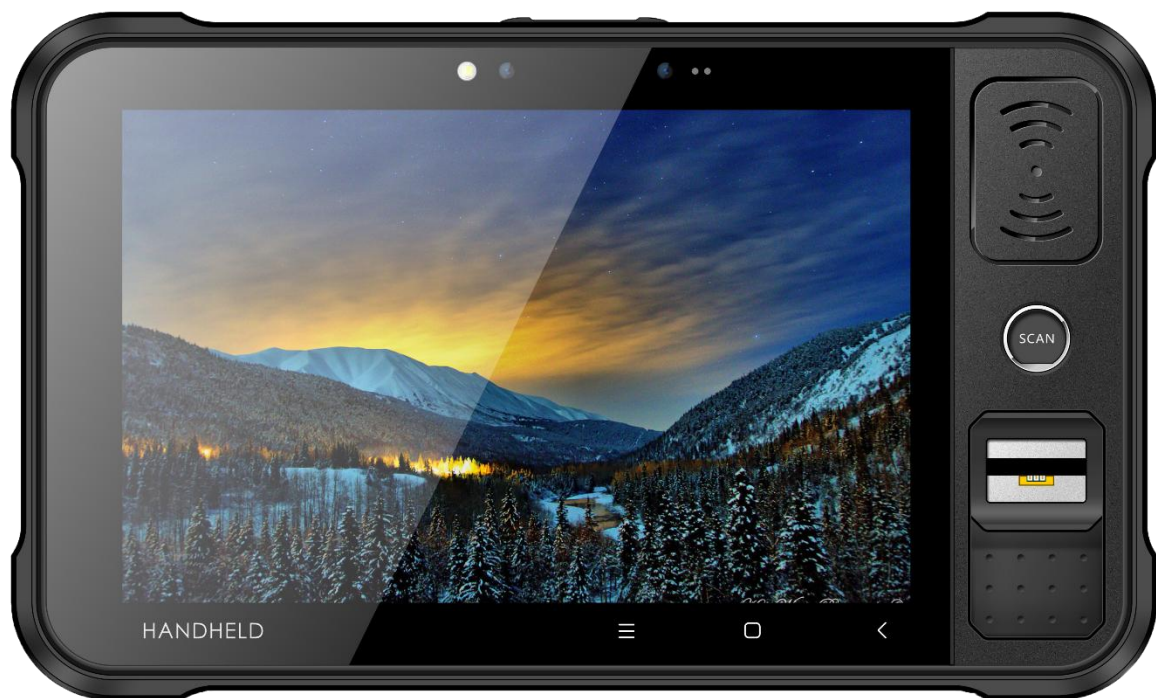

Catalog

Chapter 1 Product Intro	4
1.1 Intro	4
1.2 Precaution before using battery	5
1.3 Charger	6
1.4 Notes	7
Chapter 2 Installation instructions	8
2.1 Appearance	8
2.2 Install Micro SD and SIM cards	10
2.3 Battery charge	11
Chapter 3 Call function	12
3.1 Calling numbers	12
3.2 Contacts	12
3.3 SMS and MMS	12
Chapter 4 Barcode reader-writer	13
Chapter 5 RFID reader	16
Chapter 6 Other functions	17
6.1 PING tool	17
6.2 Bluetooth	18
6.3 GPS	19
6.4 Volume setup	20
6.5 Network	21
Chapter 7 Device characteristic	22

Chapter 1 Product Intro

1.1 Intro

P80 device is a industrial tablet that integrated with various features such as UHF RFID, barcode scanning, HF RFID/NFC and fingerprint recognition etc. It is configured with Andriod 7.1.2 OS and it possesses high reliability and expansibility. With a set of advanced data acquisition options, P80 can be operated in various industries to acquire precise and abundant datum automatically. Meanwhile, the device can match the options with staffs accordingly. The corporation which deployed P80 will realize the deployment work is simple and maintenance work will be remarkably decreased.

P80 is highly rugged, compact and durable. With IP65 water and dust proof capability, the device has met IEC sealing standard. Therefore, it can be operated by staffs such as railway inspector, road toll operator, vehicle inspector, delivery postman, power supply inspector, storage administrator, financial & insurance, police officers, security tracing etc. Wherever your staff' locations are, P80 can remain its connectivity with the system to make sure business in high-effective operating.

P80 industrial tablet adopted 4G LTE technology to realize multipath communication and calling function for field work, data exchange efficiency has been enhanced simultaneously. Therefore, P80 will bring the largest investment return for enterprises.

1.2 Precaution before using battery

- Do not leave battery unused for long time, no matter it is in device or inventory. If battery has been used for 6 months already, it should be checked for charging function or it should be disposed correctly.
- The lifespan of Li-ion battery is around 2 to 3 years, it can be circularly charged for 300 to 500 times. (One full battery charge period means completely charged and completely discharged.)
- When Li-ion battery is not in use, it will continue to discharge slowly. Therefore, battery charging status should be checked frequently and take reference of the related battery charging information on the manuals.
- Observe and record the information of a new unused and non-fully charged battery. On the basis of operating time of new battery and compare with a battery that has been used for long time. According to product configuration and application program, the operating time of battery would be different.
- Check battery charging status at regular intervals.
- When battery operating time drops below about 80%, charging time will be increased remarkably.
- If a battery is stored or otherwise unused for an extended period, be sure to follow the storage instructions in this document. If you do not follow the instructions, and the battery has no charge remaining when you check it, consider it to be damaged. Do not attempt to recharge it or to use it. Replace it with a new battery.
- Store the battery at temperatures between 5 °C and 20 °C (41 °F and 68 °F).

1.3 Charger

The charger type is GME10D-050200FGu, output voltage/current is 5V DC/2A. The plug considered as disconnect device of adapter.

1.4 Notes

Note:

Using the incorrect type battery has danger of explosion.
Please dispose the used battery according to instructions.

Note:

Due to the used enclosure material, the product shall only be connected to a USB Interface of version 2.0 or higher. The connection to so called power USB is prohibited.

Note:

The adapter shall be installed near the equipment and shall be easily accessible.

Note:

The suitable temperature for the product and accessories is 0-10°C to 50°C.

Note:

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

Chapter 2 Installation instructions

2.1 Appearance






Function Guide

1	NFC
2	Power Button
3	SCAN Button
4	Volume Setup
5	Fingerprint
6	SIM/TF Card Slot
7	TYPE-C Port

2.2 Install Micro SD and SIM cards

The cards sockets are showing as follows:

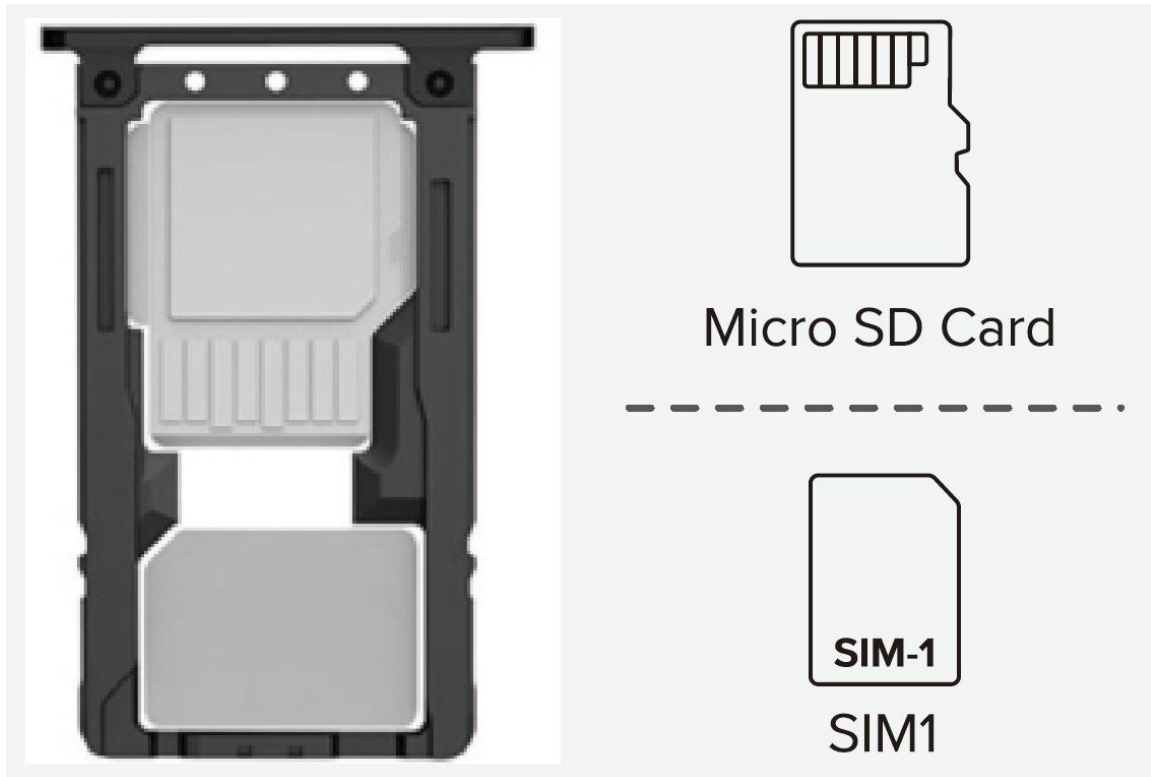




2.3 Battery charge



By using USB Type-C contact, the original adaptor should be used for charging the device. Make sure not to use other adaptors to charge the device.

Chapter 3 Call function





3.1 Calling numbers

1. Click icon .
2. Click number key to input phone numbers.
3. Click icon  to call.
4. Click icon  to end call.

3.2 Contacts


1. Click contacts to open contacts list.
2. Click icon  to add new contacts.
3. Click icon  to import/export contacts.


3.3 SMS and MMS

1. Click  to open message window.
2. Click  to input message receiver and contents.
3. Click  to send out messages.
4. Click  to add attachment pictures and videos.

Chapter 4 Barcode reader-writer

1. In App Center, to open 2D barcode scan test.
2. Press “SCAN” button or click scan key to start scanning, the parameter “Auto interval” can be adjusted.

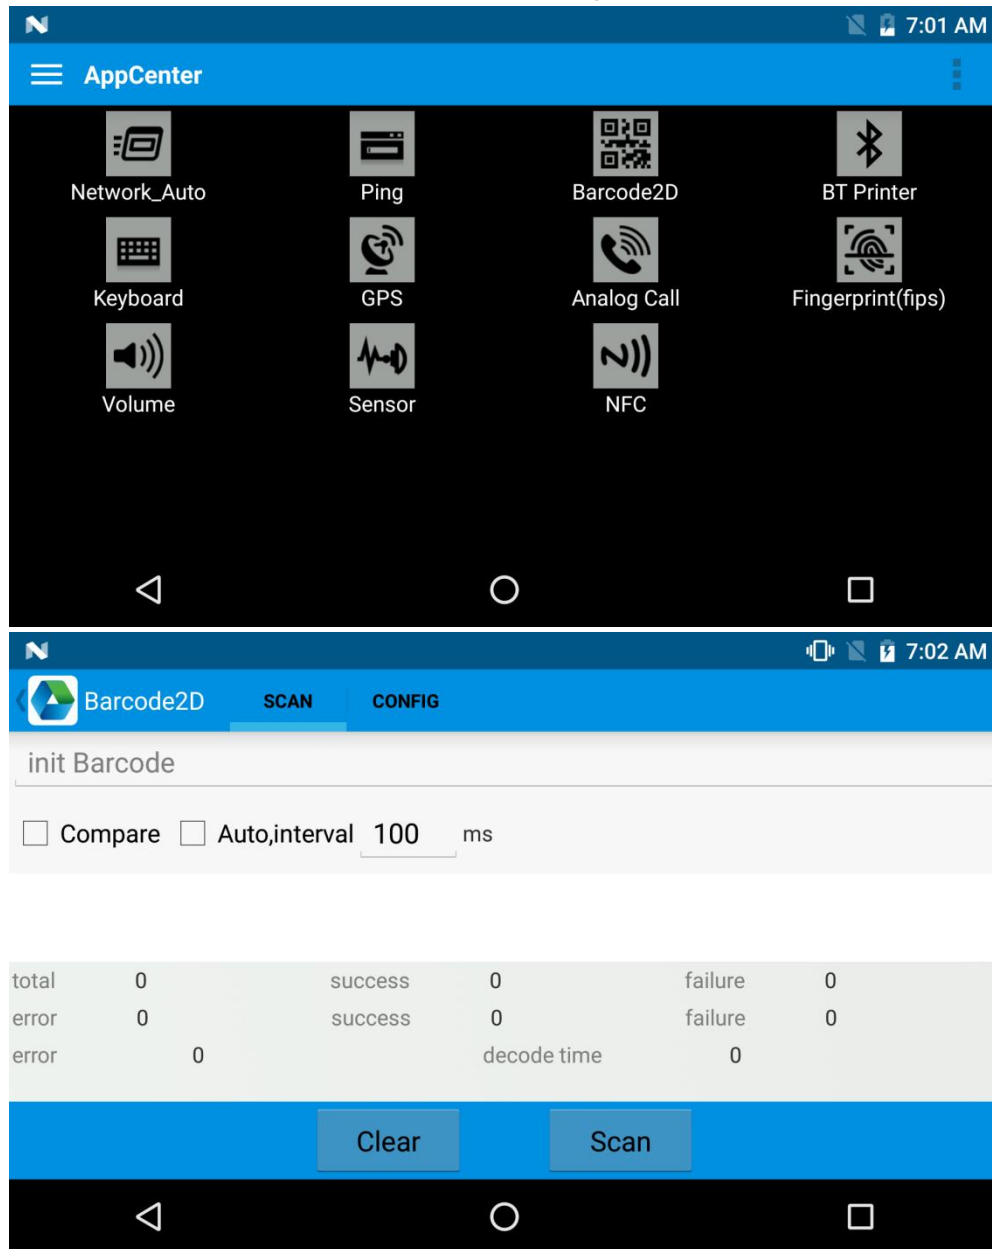

 Caution: Please scan codes in correct way otherwise the scanning will be failed.

1D barcode:



Correct



Incorrect

2D code:



Correct



Incorrect



Max. radiant power: 0.6mW


Wave length: 655nm

IEC 60825-1 (Ed.2.0).

21CFR 1040.10 and 1040.11 standard.

Chapter 5 RFID reader



Click App Center, open “NFC” to read and write tag information.

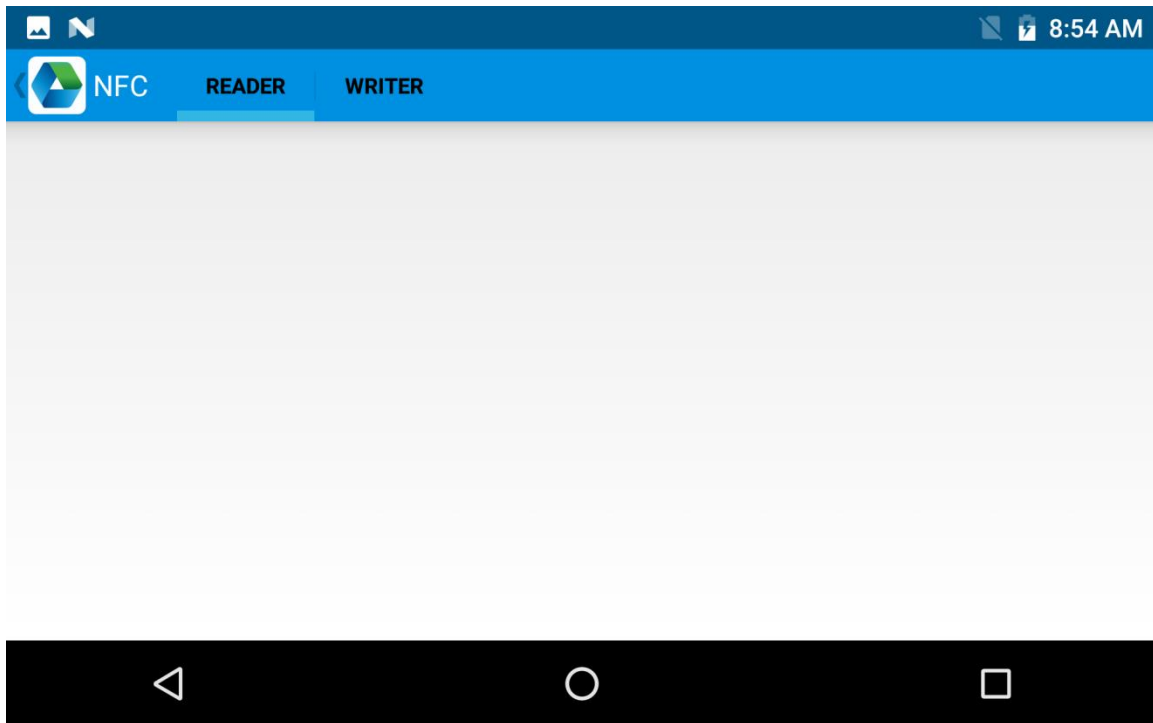

Chapter 6 Other functions


6.1 PING tool

1. Open “PING” in App Center.
2. Setup PING parameter and select external/internal address.

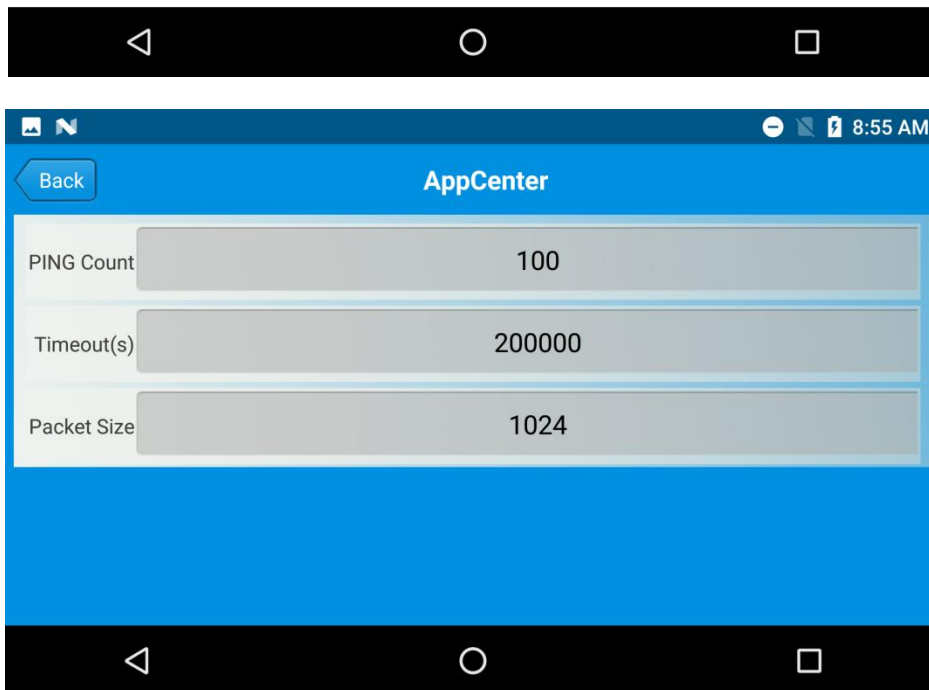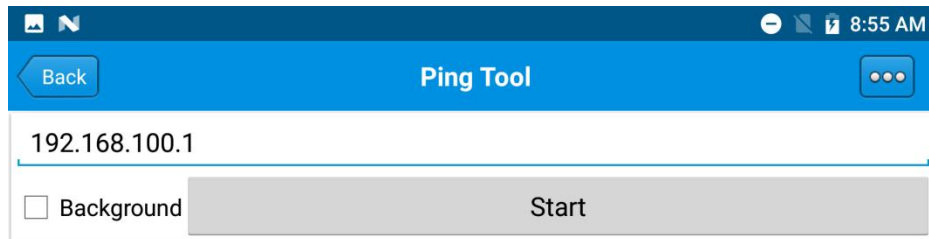



6.2 Bluetooth

1. Open “BT Printer” in App Center.
2. In the list of detected devices, click the device that you want to pair.
3. Select printer and click “Print” to start printing contents.

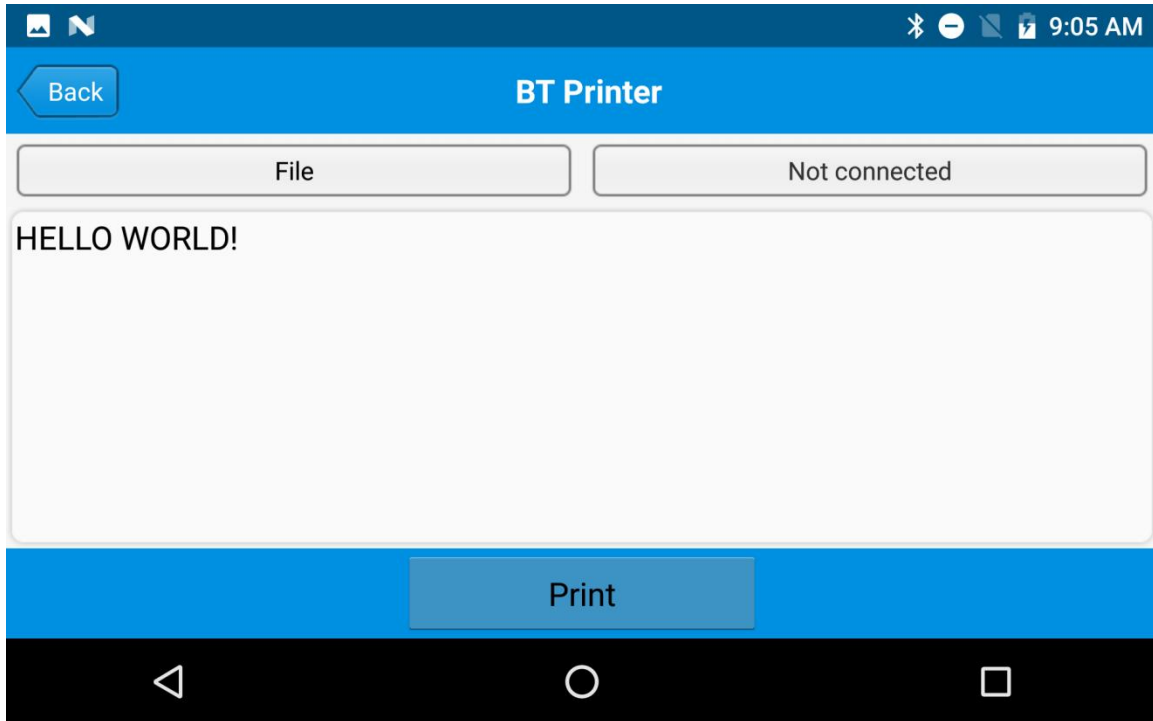


6.3 GPS

1. Click “GPS” in App Center to open GPS test.
2. Setup GPS parameters to access GPS information.

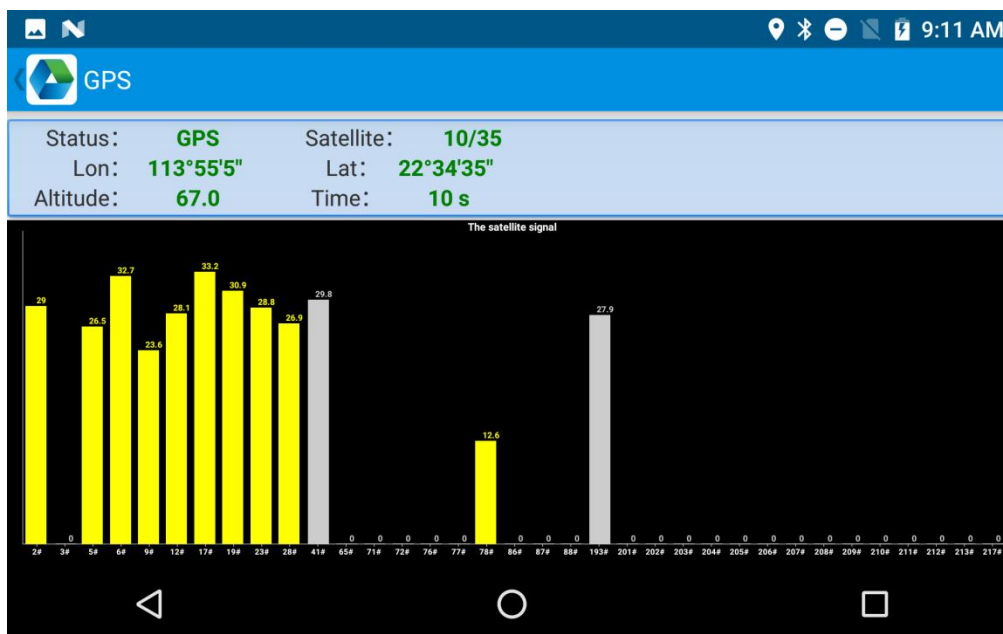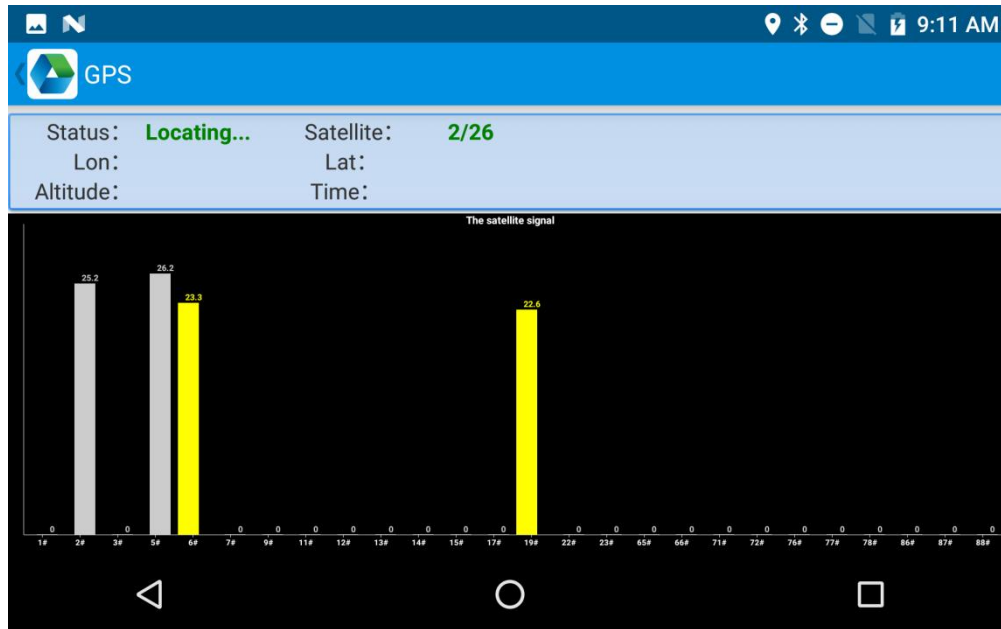

6.4 Volume setup

1. Click “Volume” in App Center.
2. Setup volume by requirements.


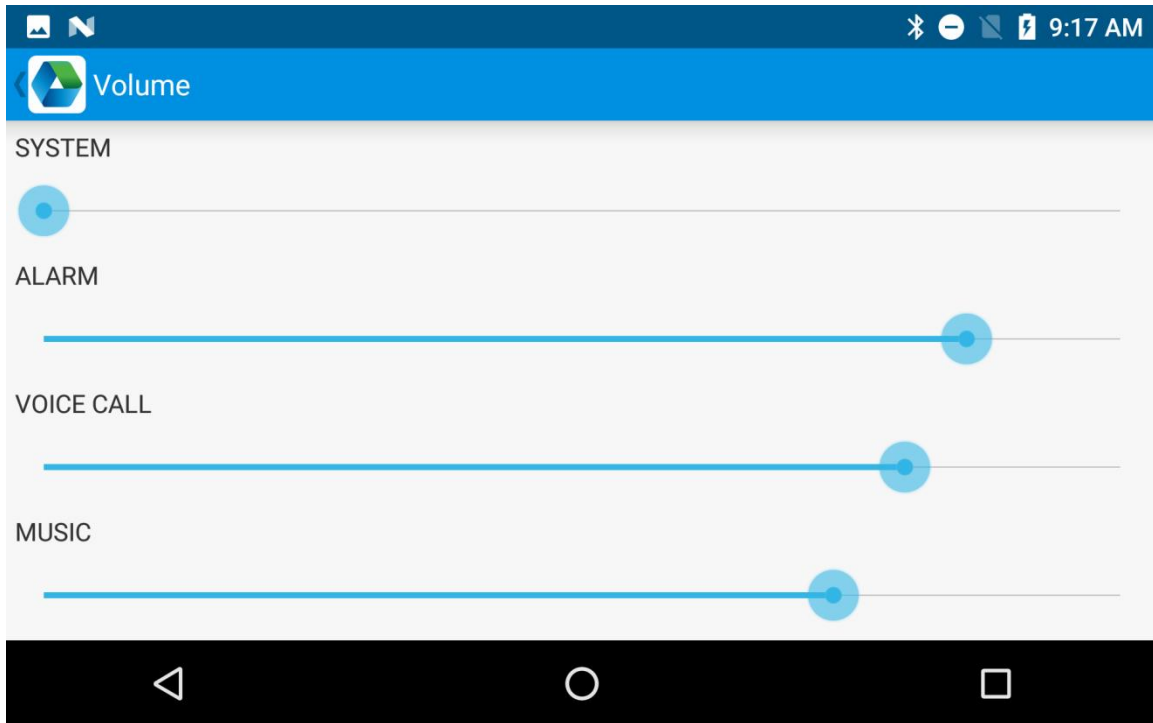


How to capture screenshot:

Press and hold power button and Volume – at same time.

6.5 Network

1. Click "Network" in App Center.
2. Click "Start" to check the IP address and PING information.

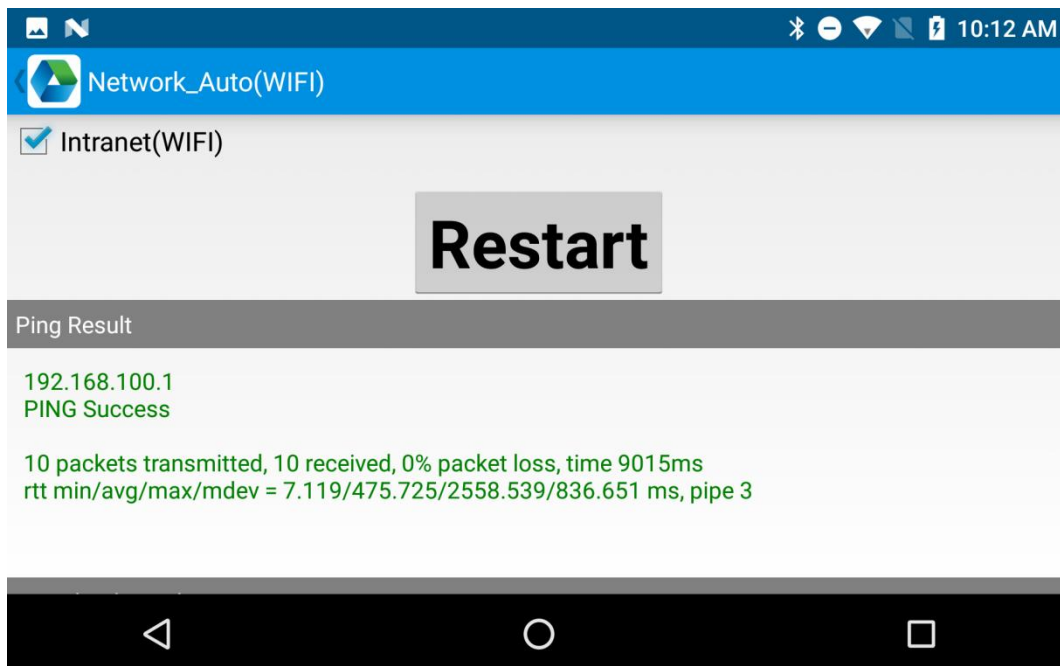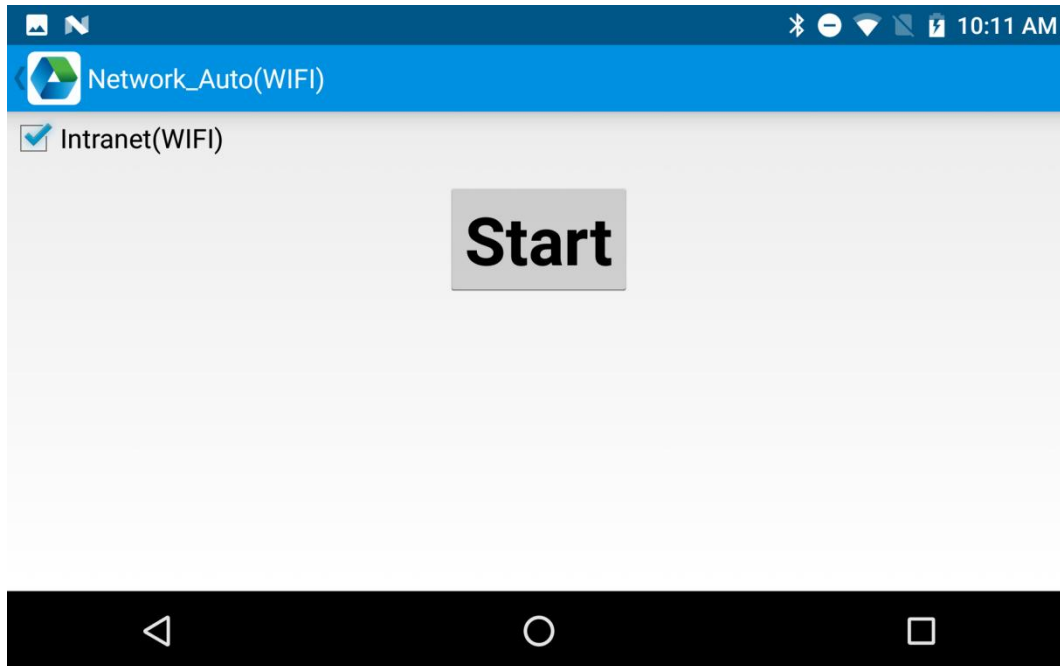

Chapter 7 Device characteristic

Physical characteristics

Size	250.8mm x 152mm x 15mm/ 9.87 x 5.98 x 0.59in
Weight	680 g / 23.99 oz. (for standard version)
Display	8" IPS LTPS 1920x1200
Touch panel	Corning Gorilla Glass 3, multi-touch panel gloves and wet hands supported
Battery	Main battery: Li-ion, rechargeable, 8700mAh
Expansion Slot	1 slot for Micro SIM card, 1 slot for Micro SIM / TF card, Optional dual PSAM card slots
Audio	1 microphone; 1 speaker
Camera	5MP front camera,13MP autofocus main camera

Performance

CPU	2.0GHz
OS	Android 13
RAM	4GB RAM
Communication Interface	USB 3.0 Type-C, OTG
ROM	64GB
Max. expansion	Supports up to 256GB Micro SD card

User environment

Operating temp.	-20°Cto 50°C
Storage Temp.	-40°C to 70°C
Humidity	5%RH - 95%RH non condensing
Sealing	IP65, IEC sealing standard
Drop specification	Multiple 1.5m/4.9ft drops to concrete across the operating temperature range

Communication

WWAN	2G: 850/900/1800/1900MHz, GPRS, EDGE 3G: CDMA EVDO: BC0 WCDMA: B1/B2/B5/B8 4G: TDD-LTE: B34/B38/B39/B40/B41 FDD-LTE: B1/B2/B3/B4/B5/B7/B8/B12/B13/B17/B20/B28
WLAN	Support 802.11 a/b/g/n/ac/d/e/h/i/k/r/v, 2.4G/5G dual-band, IPV4, IPV6; Fast roaming: PMKID caching, 802.11r, OKC; Operating Channels: 2.4G(channel 1~13), 5G(channel 36,40,44,48,52,56,60,64,100,104,108,112,116,120,124,128,132,136,140,144,149,153,157,161,165),Depends on local regulations; Security and Encryption: WEP,WPA/WPA2-PSK(TKIP and AES),WAPIPSK—EAP-TTLS,EAP-TLS, PEAP-MSCHAPv2, PEAP-LTS,PEAPGTC,etc.
WPAN	Bluetooth 5.1

Data collection

Barcode scanning	Zebra SE4710
RFID	NFC 13.56Mhz

Developing Environment

SDK	Chainway software develop kit
Language	Java
Develop	Eclipse/Android Studio